


4 Electrical connections



Stripping length min. 8.5 mm (solid or flexible wire)

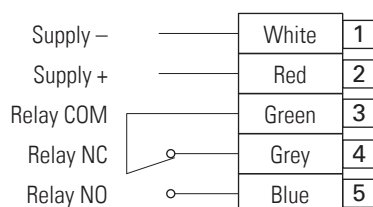

AWG 24 – 16 / 0.2 – 1.5 mm²

- Solid wire > push in
- Flexible wire > press button and push in

5 Technical data

| | |
|---------------------------------|---|
| Technology | Microwave Doppler Radar |
| Frequency | 24.125 GHz |
| Detection range | 0.1 – 0.5 m |
| Detection mode | Pulse mode: sensor detects while hand is moving Toggle mode: first movement on/ second movement off |
| Detection speed | Min: 5 Hz or ± 3 cm/s Max: 200 Hz or ± 1.2 m/s |
| Supply voltage | 12 – 24 VAC ± 10 % (50 – 60 Hz) 12 – 24 VDC + 20 % / – 10 % |
| Max. power consumption | < 1 W (with optical feedback) |
| Output | Relay with switch-over contact (free of potential) Max. switching voltage/current (DC): 1A up to 30V, 0.5A up to 60V Max. switching voltage/current (AC): 1A up to 60V, 0.5A up to 125V Max. switching power: 30 W (DC) / 60 VA (AC) |
| Output hold time | "Relay hold time": 0.3 s "LED hold time": 2 s |
| Storage / operation temperature | – 20 to + 60 °C |
| Protection class | IP65 (fixed with 4 screws, smooth surface) |
| Dimension (mm) | 88 x 88 x 38 mm (L x W x H) |
| Weight | 55 g |
| Materials | ASA / PC |

Note: CleanSwitch is according VAH list resistant to surface disinfectants in hospitals.

6 EU Declaration of Conformity



See attachment

7 WEEE



Devices with this symbol must be treated separately during disposal. This must be done in accordance with the laws of the respective countries for environmentally sound disposal, processing and recycling of electrical and electronic equipment.

8 FCC approval



This device meets the requirements of Part 15 of the FCC regulations and the RSS-210 standard of Industry Canada.

Warning: Changes or modifications made to this device may void the FCC authorisation to operate this device.

9 Contact

BBC Bircher Smart Access, BBC Bircher AG, Wiesengasse 20, CH-8222 Beringen, www.bircher.com

Made in China / Designed in Switzerland