



BRAINY24+

BENINCA

100%
Made in Italy



APPLICATION

1 or 2 actuators for swing gates, opposed sliding gates, and industrial folding doors with a maximum of 2 sections

CONTROL UNIT POWER SUPPLY


100/250 Vac – 50/60 Hz

MOTORS POWER SUPPLY

24 Vdc 200W + 200W

MAIN FUNCTIONS

Integrated LCD display | Integrated 433.92 MHz 64-code receiver with 3 encoding systems (Advanced Rolling Code, Rolling Code, Fixed Code) | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Separate limit switch inputs for each motor | Open, close, step by step, pedestrian and stop inputs | Separate photocell inputs in opening-closing and in closing phases | Input for N.C. or 8K2 sensitive edge | Output for electric lock 12 VDC | Output for configuration as gate open indicator or photocell testing | Output for configuration as second radio channel or service light | Autotsetting of operating parameters | Separate electronic torque adjustment for each motor | Anti-crushing safety through amperometric detection and encoder management | Separate adjustable slowdowns for each motor | Advantouch system to configure parameters and manage radio transmitters | Number of maneuvers | Programming access password | Maintenance warning | **Built-in battery charger, compatible with batteries DA.BT2/DA.BT6**

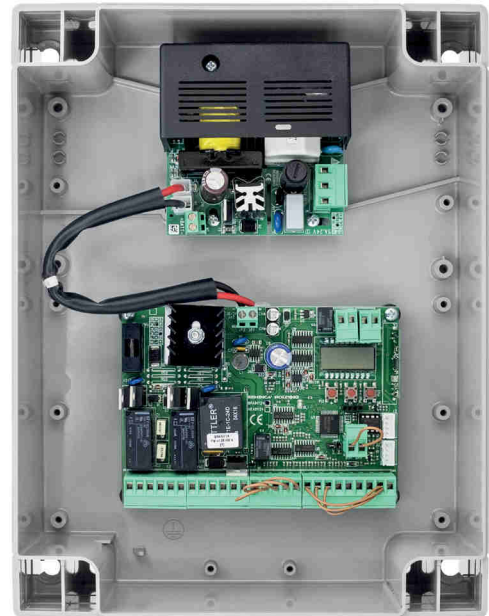

DU.V96
12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



DU.V90
12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



DU.9990
Covering plate for DU.V90.



BRAINY24.CB-SW
Accessory equipped with 1.2 Ah batteries and support bracket.

AUTOMATISMI BENINCA SpA • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

